



Technical Data Sheet

ICON Weep Vent

PRODUCT

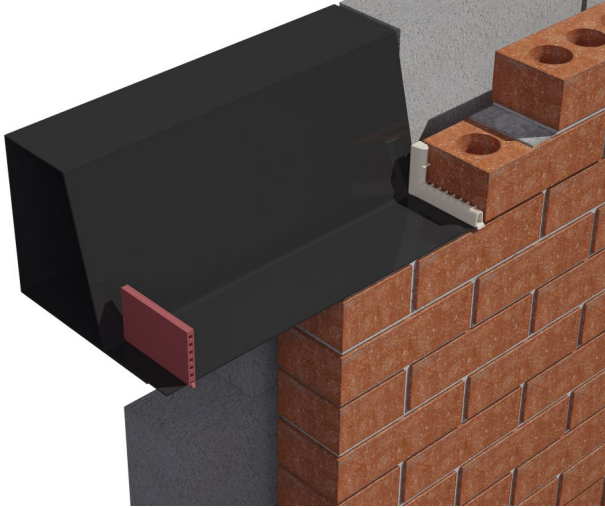

Product Details

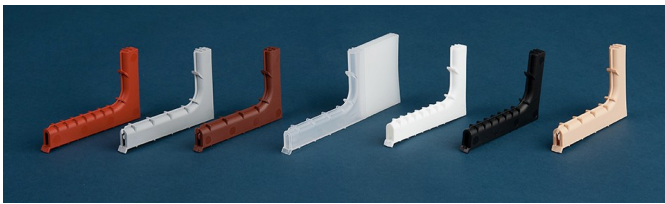

Free Area	IWG—165mm ² per unit
Size	IWR - H65xL100xW10mm IWG - H15-65xL100xW10mm
Material	Injection moulded polypropylene

Colour	Transparent, Beige & Terracotta
Code	IWR - Rectangular weep IWG - Gun shape weep



USES

- For use in external walls, 100mm or more
- Provides ventilation and drainage for cavity
- Where a cavity must be ventilated
- For use with ICON cavity & chimney trays

FEATURES & BENEFITS

- Provides ventilation and drainage without problems
- Used in new or refurbishment work
- Quick and easy to install
- UV stable
- Available in Transparent, Buff, Terracotta, Black, Brown, White & Grey
- Integral front grille prevents entry of large nest building insects into cavity
- Tested to EN13141-1
- Typically installed at not greater than 900mm c/c
- Can be extended to suit any length using the weep extension piece

INSTALLATION

- Wall vents should be used whenever water could collect inside a cavity wall, such as over external lintels or whenever a cavity or chimney tray is installed.
- Weep vents should be placed directly on top of the base of a cavity tray or DPC or on the front flange of the lintel.
- Weep vents fit between brick or block course vertically
- Care should be taken to ensure the wall weep vent is kept clear of mortar and does not become blocked. This is particularly important at the back of the weep which could be blocked by mortar dropping from above.
- Check the overall external wall dimension as it may be necessary to fit the weep extension pieces.

